
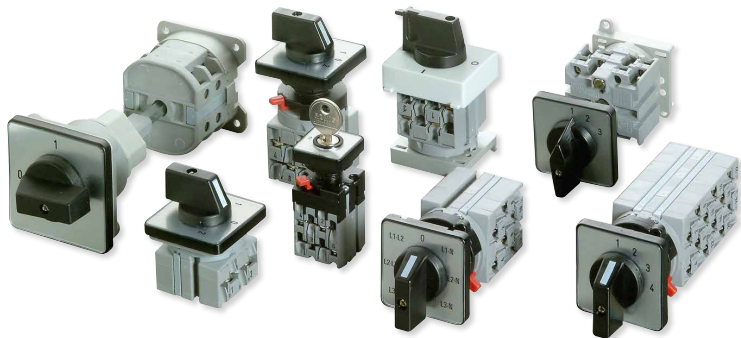





ROTARY CAM SWITCHES DATA




Other configurations and sizes on request

	I _{th} A	AC23 kW (3x400V)	AC3 kW	U V	connection cross mm ²
D00	10	3,0	2,2	500	1,5
D0	25	7,5	5,5	690	4
D1-16	25	9,0	7,5	690	6
D1-20	32	10,5	9,0	690	6
D1-32	45	15,0	11,0	690	6
D1-40	80	22,0	19,0	690	2x16
D1-55	100	37,0	30,0	690	35
D2-63	100	26,5	22,0	690	70
D2-100	125	32,5	27,0	690	70
D2-160	160	40,0	37,0	690	70
D2-126	200	45,5	40,0	690	70
D3-250	315	76,0	64,0	690	185

E													
	TYPE	A	A1	C	F	L1	L2	L3	L4	L5	L6	L7	L8
 	D00-4	30	20	28	30	29	37	45	53	61	69	77	85
	D00-6	30	20	30	28	33	45	57	69	81	93	105	117
	D0-7	48	36	40	39	34	46	58	70	82	94	106	118
	D0-8	48	36	40	39	34	46	58	70	82	94	106	118
	D0-13	48	36	43	43	32	41	51	60	70	79	89	98
	D1-16	66	48	54	56	40	53	66	79	92	105	118	131
	D1-20	66	48	54	56	40	53	66	79	92	105	118	131
	D1-32	66	48	54	56	40	53	66	79	92	105	118	131
	D1-40	66	48	68	64	50	71	92	113	134	155	176	197

  IP65	ZM	TYPE	A	C	F	L1	L2	L3	L4	L5	L6	L7	L8	
		D00-4	30	28	30	43	51	59	67	75	83	91	99	
		D00-6	30	30	28	46	58	70	82	94	106	118	130	
		D0-7	48	40	43	58	70	82	94	106	118	130	142	
		D0-8	48	40	39	58	70	82	94	106	118	130	142	
		D0-13	48	43	43	56	65	75	84	94	103	113	122	
		D1-16	66	54	56	60	73	86	99	112	125	138	151	
		D1-20	66	54	56	60	73	86	99	112	125	138	151	
		D1-32	66	54	56	60	73	86	99	112	125	138	151	
		D1-40	66	68	64	70	91	112	133	154	175	196	217	


	T	TYPE	A	B	C	F	L1	L2	L3					
		D00-6	35	45	28	30	45	45	45					
		D0-8	52,5	45	40	39	45	45	45					
		D1-16	52,5	45	54	56	45	45	56					
		D1-20	52,5	45	54	56	45	45	56					
		D1-32	52,5	45	54	56	45	45	56					

ROTARY CAM SWITCHES


Connection diagram

Voltmeter change-over switch

2Ka-A1086




F 417




3 line
voltages

Voltmeter change-over switch





3Ka-A1088



F 473



3 line and
3 phases voltage

Thermal rated current I_{th} (in A)	Rated perf. at 3x400V (in kW)	4-Hole mounting				Central mounting			DIN-Railmounting		
								IP65			
I_{th}	AC3	Type				Type			Type		
10	2,2	V3/	4	E		V3/	4	ZM			
10	2,2	V3/	6	E		V3/	6	ZM	V3/	6	T
25	5,5	V3/	7	E		V3/	7	ZM			
25	5,5	V3/	8	E		V3/	8	ZM	V3/	8	T
25	7,5	V3/	16	E		V3/	16	ZM			
10	2,2	V30/	4	E		V30/	4	ZM			
10	2,2	V30/	6	E		V30/	6	ZM	V30/	6	T
25	5,5	V30/	7	E		V30/	7	ZM			
25	5,5	V30/	8	E		V30/	8	ZM	V30/	8	T
25	7,5	V30/	16	E		V30/	16	ZM			